



MaryTex / MaryWrap

ARTIFICIAL GRASS AT ITS BEST

Wrapping

- » Inline system
- » Equipped with automatic winder WinOro
- » No waste, fewer operators, no interim storage
- » Transport belt for final bobbins available

Texturing

- » Inline or offline system
- » Combined with wrapping
- » Equipped with automatic winder WinOro
- » Transport belt for final bobbins and unrolling equipment for offline process available



Material / application	Monofilaments
Material	LLDPE, PP, PA6, PET
Wrapping yarn	PES-DTY
Denier range*	8 x 400 dtex 6 x 2,500 dtex
Spindle speed*	up to 11,000 rpm
Spiral wraps*	30 up to 55 per meter
Take-up speed*	70 up to 350 m/min

* max. values cannot be combined

Material / application	Monofilaments and fibrillated tapes
Monofilament Tape	LLDPE, PP, PA6, PET LLDPE, PP
Denier range* Monofilament	8 x 400 dtex / 6 x 2,500 dtex
Tape**	400 up to 8,000 dtex
Texturing feed yarn speed*	up to 400 m/min
Take-up speed*	70 up to 350 m/min
Special features	1 and 2 end process, Central electrical system with cooling, Very even texturing of extreme wide range of deniers & materials due to a wide variety of nozzle-inserts & needles, Supervision of constant texturing

* max. values cannot be combined

** depending on tape properties

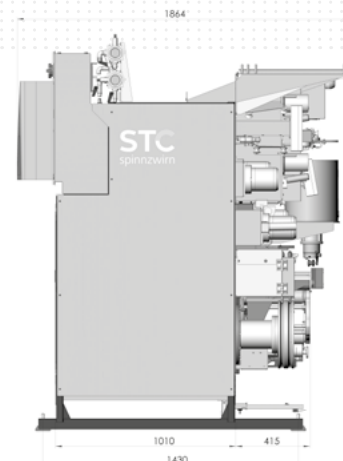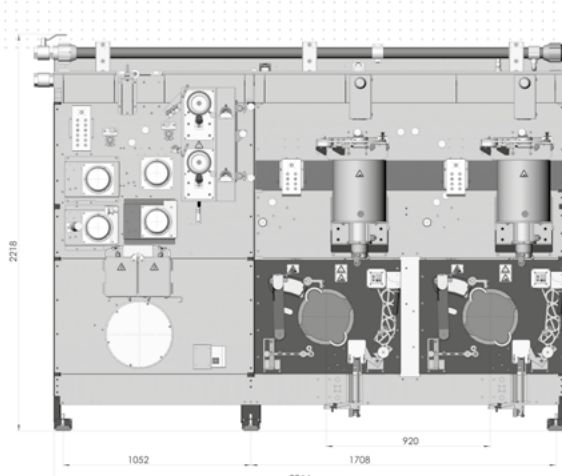



Textile machinery and
equipment from Chemnitz

A member of Starlinger Group

stc-spinnzwirn.com

STC Spinnzwirn GmbH

Zwickauer Straße 247
09116 Chemnitz
Germany
+ 49 371 23 88 / 240
info@stc-spinnzwirn.com
stc-spinnzwirn.com

The information supplied in this
brochure is for guidance only.
We reserve the right to modify
it at any time.

Reprint only with expressed
Permission of STC Spinnzwirn