

## DD2000

### TWISTING OF TAPES FOR JUTE REPLACEMENT, SEWING YARN, AGROTEXTILES AND GEOTEXTILES

- » Oiling unit for the production of sewing yarn
- » Bobbin formation with precision winding for an increased downstream process speed
- » Meter counting for equal bobbin length
- » Individual control of all twisting positions to have the necessary flexibility



Material / application	Fibrillated tapes for sewing yarn, jute replacement for woven carpets, agro- and geotextiles
Material	PP, HDPE
Denier range*	900 up to 6,600 dtex
Spindle speed*	2,000 up to 7,500 (10,000) rpm
Turns per meter**	20 up to 150
Take-up speed*	70 up to 500 m/min

\* max. values cannot be combined

\*\* depends on spindle speed and denier

Supply bobbin	
Max. bobbin diameter	300 mm
Max. stroke	300 mm*
Inner tube diameter	73 up to 110 mm
Twisted bobbin	
Max. bobbin diameter	300 mm
Inner tube diameter	73/90/94 mm*
Stroke	200/250/260/300 mm

\* others on request

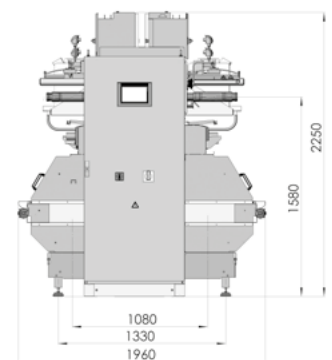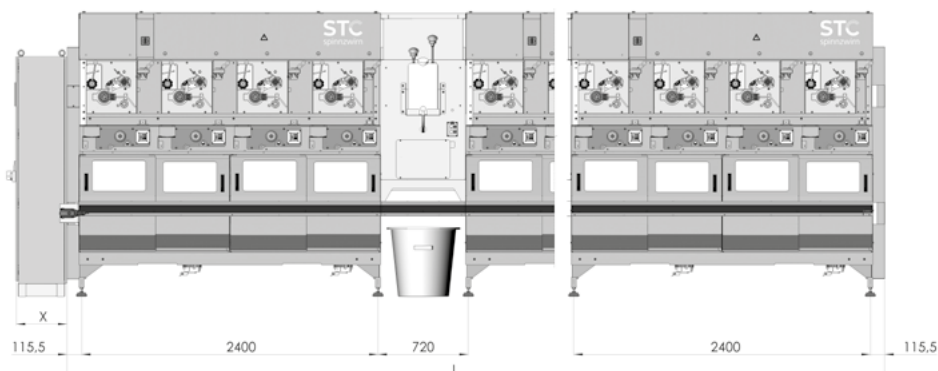



Textile machinery and  
equipment from Chemnitz

A member of Starlinger Group

[stc-spinnzwirn.com](http://stc-spinnzwirn.com)

**STC Spinnzwirn GmbH**

Zwickauer Straße 247  
09116 Chemnitz  
Germany  
+ 49 371 23 88 / 240  
[info@stc-spinnzwirn.com](mailto:info@stc-spinnzwirn.com)  
[stc-spinnzwirn.com](http://stc-spinnzwirn.com)

The information supplied in this  
brochure is for guidance only.  
We reserve the right to modify  
it at any time.

Reprint only with expressed  
Permission of STC Spinnzwirn