



## WinTape


### THE AUTOMATIC YARN TENSION CONTROLLED WINDER FOR SPECIAL MULTIFILAMENT YARNS

- » Fully automatic winder offering two operating sides
- » Tube magazine for up to 4 empty tubes and parking position for up to 2 full bobbins
- » Ideally prepared for automation due to fixation of yarn ends onto full bobbin and available transport belt
- » Connection to an upper level control system via OPC possible

Material / application*	Denier range (in dtex)	Winding speed (in m/min)	Tube length (in mm)	Tube ID** (in mm)	Traverse stroke (in mm)	Package diameter (in mm)
PA/PES/PP	300 up to 2,000	100 up to 800	290 or 330	82.5 or 90	260 or 300	max. 320
Acrylic	300 up to 3,000	100 up to 800	290	90	260	max. 320
Cellulose based	50 up to 2,000	100 up to 800	290	90	260	max. 320

\* max. values cannot be combined

\*\* others on request

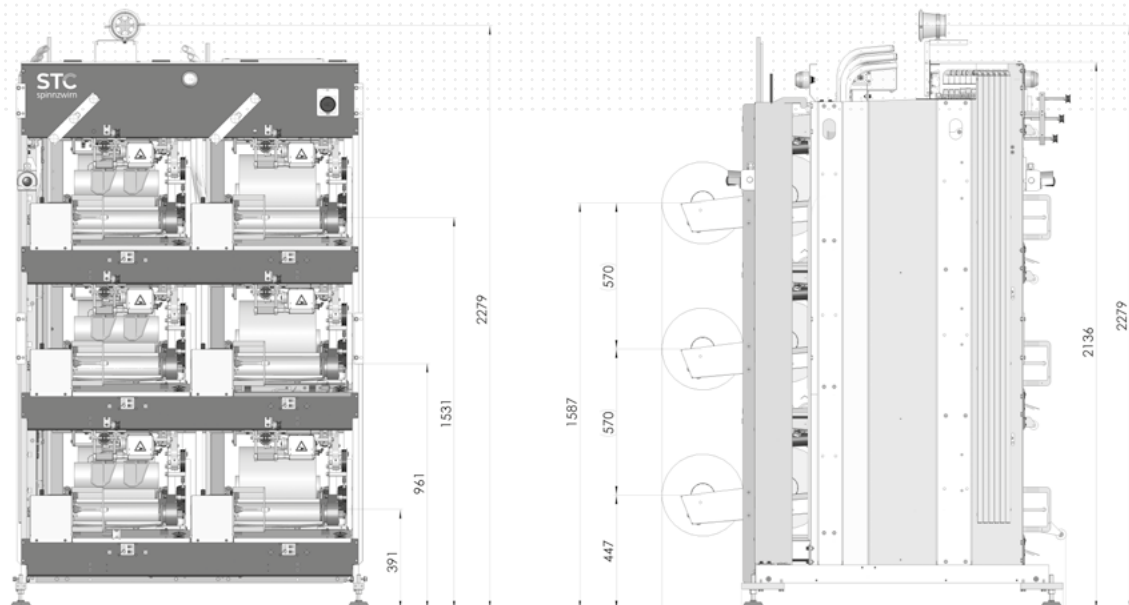



Textile machinery and  
equipment from Chemnitz

A member of Starlinger Group

[stc-spinnzwirn.com](http://stc-spinnzwirn.com)

**STC Spinnzwirn GmbH**

Zwickauer Straße 247  
09116 Chemnitz  
Germany  
+ 49 371 23 88 / 240  
[info@stc-spinnzwirn.com](mailto:info@stc-spinnzwirn.com)  
[stc-spinnzwirn.com](http://stc-spinnzwirn.com)

The information supplied in this  
brochure is for guidance only.  
We reserve the right to modify  
it at any time.

Reprint only with expressed  
Permission of STC Spinnzwirn